


# Xtag<sup>TM</sup>

## Personnel, Baby, Infant and Patient Monitoring System

### General

- ◆ Portal reader range adjustable from 4 to 14 metres
- ◆ Long range reader for tamper and status detection to 25 metres
- ◆ Multiple Tag in field ID reading capability
- ◆ Single box solution with self contained antenna
- ◆ Simple RS485 BELDEN UTP network for ease of installation
- ◆ Active Tag low battery indication
- ◆ Compatible with Xtag range of long life active tags.
- ◆ Distributed intelligence within readers

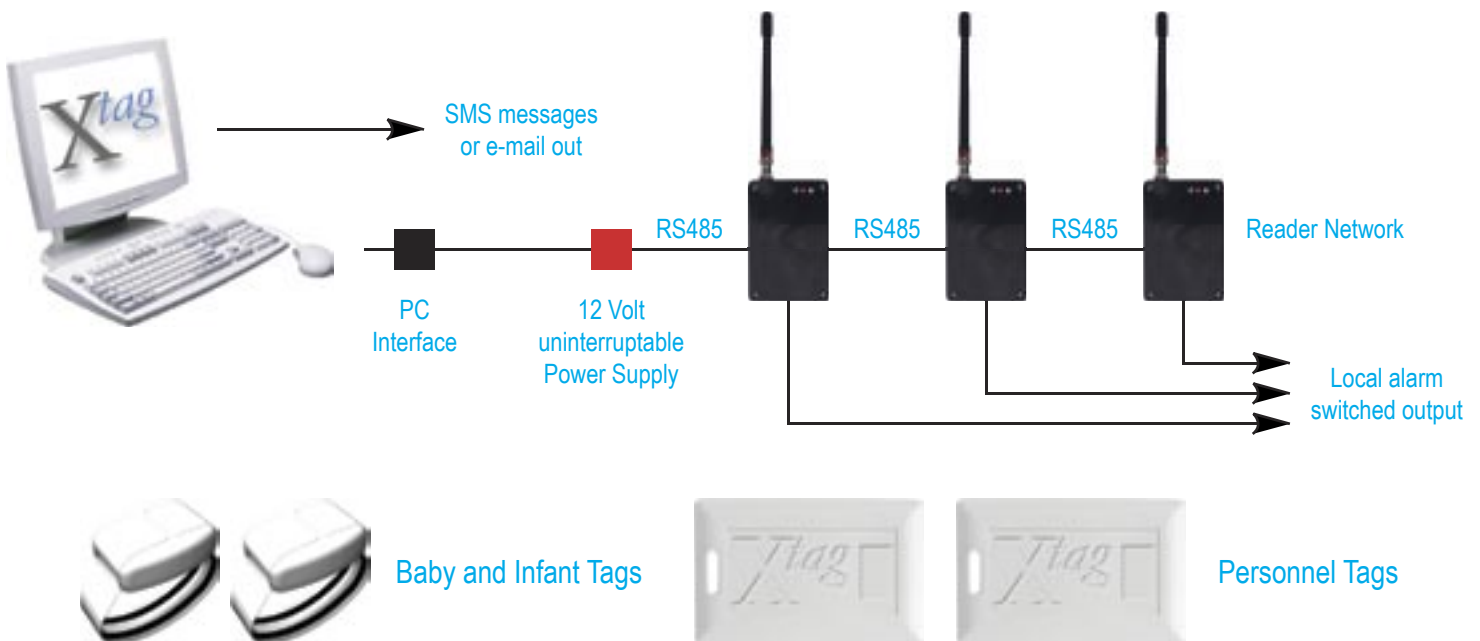

### Applications

- ◆ Aimed at the medical and care markets
- ◆ Baby and Infant ward monitoring
- ◆ Patient Wanderer Control, Infant and Child creche applications
- ◆ Education and school applications



Xtag Australasia Pty Ltd, PO Box 1022, Wangara, WA 6065 Australia  
Telephone: +61 8 94021139 Fax: +61 8 94021149  
www.xtag.net.au - sales@xtag.net.au

© Xtag Ltd, 2006

Xtag's are protected under a community design registration no. 345921 and several patents pending.